iNAT-RQT-400x

MEMS

FOG

HRG

RLG

Highly reliable INS/GNSS/+ solutions for most demanding airborne, maritime and land applications

iNAT-RQT-400x is a member of iMAR's iNAT series and one of the smallest yet powerful RLG based INS/GNSS inertial navigation, measurement, surveying and control systems. It provides real time kinematic measurements, such as acceleration, angular rate, attitude, true heading, velocity and position with a data update rate of up to 400 Hz. **iNAT-RQT-400x** comes with advanced integrated sensor and data fusion technology.

SWaP

+71° -40° °C

IP 67

ITAR FREE

APPLICATIONS

Manned and unmanned vehicles
Surveying & Monitoring
Stabilization & Control
Localization & Navigation

KEY FEATURES

MIL-STD qualified
Internal Data Logging (128 GByte)
Single & Dual Antenna GNSS
Maintenance-free realtime clock

PERFORMANCE

Data Rate	up to 400 Hz
Heading	< 0.017 ° sec lat
Attitude	< 0.01 °
Position	< 0.01 m

© iMAR® 2025

iMAR
NAVIGATION & CONTROL

iNAT-RQT - Family

ONE ARCHITECTURE FOR ALL TECHNOLOGIES

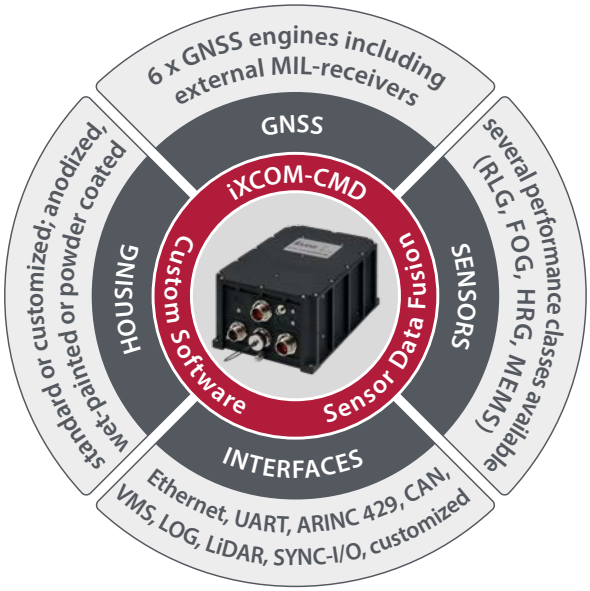

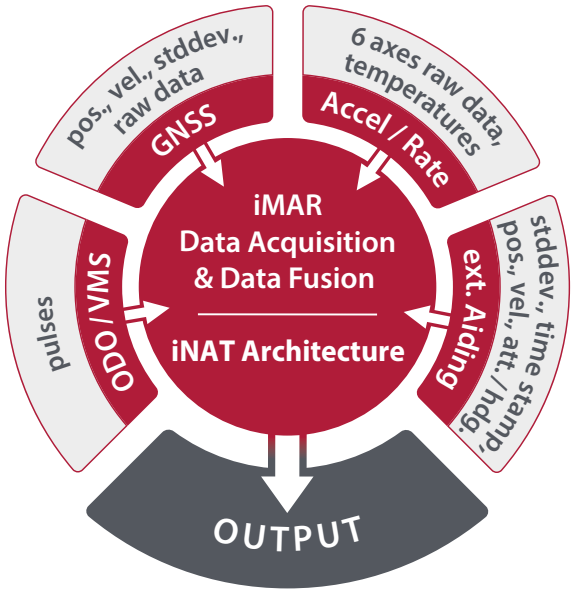

MADE FOR YOUR APPLICATION

iNAT architecture allows application specific software configurations in order to achieve best performance even in most demanding environments.

INTERFACES & PROTOCOLS

NMEA, RTCM 104, TCP/IP, UDP, EtherCat, NTRIP, NTP / PTP Time Server, CAN, Ethernet, UART RS422/RS232, GP-I/O, PPS, PPT, USB; iXCOM communication protocol for all processed and raw data.

QUALIFICATION

iNAT-RQT is qualified according to CE, MIL-STD-810H, MIL-STD-461G, MIL-STD-704F and partially DO160G and EN 50121.

EXTENSIVE AIDING CAPABILITIES

iNAT-RQT is designed to operate with external sensors like TAS, BaroAlto, LiDAR, DVL/EM-Log, magnetometer, odometer etc.

SENSOR DATA FUSION

The integrated advanced 42+ state extended Kalman filter allows advanced and predictable data fusion of multiple data sources, e.g. INS, GNSS and additional sensors.

MODULARITY

The modular nature of iNAT-Family allows iMAR to configure the systems with a wide range of best in class inertial sensors and GNSS receivers, expandable at any time and best fitted to customer's needs.

© iMAR® 2025

iMAR NAVIGATION & CONTROL

iNAT-RQT - Family

TECHNICAL DATA (iNAT-RQT-4001)

NAVIGATION PERFORMANCE

Position & Velocity Accuracy

Position (GNSS RTK post-proc.) **)	± 0.01 m
Position (GNSS RTK) **)	± 0.02 m
Position (GNSS with / w/o SBAS)	± 0.6 m / ± 1.2 m
Position (GNSS denied w/o odometer)*) ***)	0.01... 0.08 % DT or 10 m
Position, free inertial (CEP50)	0.5 nm/h
Velocity (RTK)	0.01 m/s
Velocity, free inertial ****)	< 1 m/s

Angles

Range (Heading/Yaw, Roll, Pitch)	unlimited
True Heading (free inertial)	0.017 ° secLat
Heading/Yaw (after 600 s GNSS denied)	0.018 ° secLat
Heading/Yaw (post-proc.) **)	< 0.01 °
Roll/Pitch	0.02 °
Roll/Pitch (ISA, initial, w/o any aiding)	0.005 °
Dual-Antenna initial Heading, with 1 m baseline	0.2 °
with 2 m baseline	0.1 °
Alignment duration	0.050 ° secLat @ 5 min.
	0.017 ° secLat @ 10 min.

MECHANICAL

Size (W x H x D)	approx. 187 x 128 x 296 mm
Weight	approx. 6.9 kg
Connectors	MIL-C-38999 Series III (Data, Power)
	TNC (Antenna)

GNSS

Constellations	GPS, GAL, GLO, BDS, IRNSS
Frequencies	up to all frequencies
Features	SBAS, RTK, PPP, Basestation, etc.
High speed version (> 515 m/s)	on request

ELECTRICAL

Operating voltage	9 ... 34 V DC
Power consumption	approx. 17 W
Power inputs	2 x insulated

IMU SPECIFICATION

	ACCELEROMETERS	GYROSCOPES
Range	40 g	± 400 °/s
Resolution	< 2 µg	< 0.000'000'33 °/s
Bias instability (AV)	< 12 µg	< 0.001 °/h
Initial Bias	< 50 µg	< 0.002 °/h
Noise (AV)	12 µg/√Hz	< 0.0016 °/√h
Non-orthonality	< 50 µrad	< 30 µrad
Scale factor error	< 100 ppm	< 15 ppm
Non-linearity	< 30 µg/g^2	< 10 ppm
Bandwidth	250 Hz	250 Hz

DATA OUTPUT, DATA INPUT

Data Output

Data Rate	up to 400 Hz
Latency / Jitter / Time stamp	< 7 ms / < 1 ms / < 1 µs

Input / Output Interfaces

PPS, PPT, GP Trigger/Sync I/O, 3 x encoder / VMS input (wide range opto-coupler; RS422 level compatible)

Communication Interfaces and Protocols (excerpt)

Ethernet (TCP/IP, UDP), 4 x UART (RS232/422), 2 x CAN, USB, NMEA183, ARINC 825, NTRIP caster with RTCM 104, NTP, PTP, iXCOM, ROS-2, Python, SDK C++

ENVIRONMENTAL

Temperature (operational / storage)	-40 .. +71 °C / -55 .. +85 °C
Shock (operational)	20 g, 11 ms (half-sine)
Shock (endurance)	50 g, 11 ms (half-sine)
Vibration (operational)	10 ... 2'000 Hz, 6.3 g RMS
Maximum altitude (operational)	60'000 ft
Environmental protection	IP67
Magnetic sensitivity	typ 0.000'3 °/h/Gauss
MTBF	> 50'000 h (inertial core > 120'000 h)

)** for road and rail applications *)** after sufficient availibility of GNSS aiding and motion dynamics *****)** without VMS/odometer, during 1 hr GNSS denied environment ******)** can be improved by sufficient GNSS aiding and motion dynamics before GNSS denied scenario

*Each individual **iNAT-RQT-400x** undergoes a calibration and verification testing process at iMAR's calibration laboratory. Performance specifications are based on comprehensive field testing and results from real-world applications, and are regularly tested to ensure continued conformance to such specifications.*

© iMAR® 2025

iMAR NAVIGATION & CONTROL

iNAT-RQT - Family

SYSTEM FEATURES AND SENSOR PERFORMANCES

iNAT-	PERFORMANCE		HDG	GYROSCOPES				ACCELEROMETERS			COST
	Accuracy	[g] Vibration immunity	[°secLat] Heading	[°/s] Range	[°/√h] ARW (AV)	AV [°/h] Bias instability	ppm Scale factor error	[g] Range	µg Bias day-to-day	[µg√Hz] VRW	
RQT-4001	★★★★★	★★★★★	0.017	± 400	0.0016	< 0.001	< 15	40 [1)]	50	< 12	€€€€€
RQT-4002A	★★★★½	★★★★★	0.035	± 400	0.0025	< 0.001	< 15	40 [1)]	75	< 12	€€€€€
RQT-4002	★★★★☆	★★★★★	0.057	± 400	0.0028	< 0.001	< 15	40 [1)]	75	< 12	€€€€€
RQT-4003	★★★½☆	★★★★★	0.086	± 400	0.0050	< 0.001	< 15	40 [1)]	100	< 12	€€€€€
FSLG-01	★★½☆☆	★★★☆☆	0.3	± 600	0.0045	< 0.01	< 150	20 [1)]	300	< 40	€€€€€
MSLG-01	★★☆☆☆	★★★☆☆	- - -	± 490	0.15	< 0.3	< 750	15 [1)]	1500	< 100	€€€€€
Custom	Option: integration of other inertial and GNSS sensors										

Table Notes: all values1σ, except ranges [1)] other ranges available

iNAT-RQT

iNAT-M

iNAT-FSLG

iNAT-MSLG

iATTHEMO-TRIDENT-R

iMAR has been an EASA Part 21G approved manufacturing organization for aviation products since 2011, certified by the German Federal Aviation Office (Luftfahrt-Bundesamt) and it is also certified regarding the Safety Management System (Approval Number: DE.21G.0254).

MIL-STD 810H/461G/704F | SWaP | iNAT Family | IP 67 | ITAR FREE

General information about iMAR's INS/GNSS solutions for all applications

© iMAR® 2025

rev. 2.07 DOC250328019 technical modifications reserved w/o notice

iMAR Navigation GmbH
Im Reihersbruch 3
66386 St. Ingbert / Germany
sales@imar-navigation.de
www.imar-navigation.de